
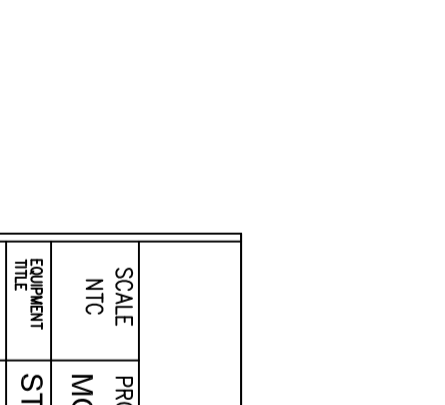


LOCATION	Area	Volume	No. of Bars	Weight	A	B	C	D	E
FOUNDATION F1	112	2240	48	96	300	1700	300		
FOUNDATION F2	112	2240	48	96	300	1700	300		
FOUNDATION F1	112	2240	48	96	300	1700	300		
FOUNDATION F2	112	2240	48	96	300	1700	300		
FOUNDATION F1	112	2240	48	96	300	1700	300		
FOUNDATION F2	112	2240	48	96	300	1700	300		
FOUNDATION F1	112	2240	48	96	300	1700	300		
FOUNDATION F2	112	2240	48	96	300	1700	300		
FOUNDATION F1	112	2240	48	96	300	1700	300		
FOUNDATION F2	112	2240	48	96	300	1700	300		
FOUNDATION F1	112	2240	48	96	300	1700	300		
FOUNDATION F2	112	2240	48	96	300	1700	300		

REINFORCEMENT SUMMARY															
FOUNDATION	F1	F2	F1	F2	F1	F2	F1	F2	F1	F2	F1	F2	F1	F2	
FOUNDATION F1	112	2240	48	96	300	1700	300								
FOUNDATION F2	112	2240	48	96	300	1700	300								
FOUNDATION F1	112	2240	48	96	300	1700	300								
FOUNDATION F2	112	2240	48	96	300	1700	300								
FOUNDATION F1	112	2240	48	96	300	1700	300								
FOUNDATION F2	112	2240	48	96	300	1700	300								
FOUNDATION F1	112	2240	48	96	300	1700	300								
FOUNDATION F2	112	2240	48	96	300	1700	300								
FOUNDATION F1	112	2240	48	96	300	1700	300								
FOUNDATION F2	112	2240	48	96	300	1700	300								

GENERAL NOTES

1. Contractor to check and confirm all dimensions on all sections commencing any work.
2. All dimensions shall be in millimeters unless otherwise stated.
3. All dimensions shall be in millimeters unless otherwise stated.
4. Concrete grade to be C30.
5. Nominal size of coarse aggregate to be 10mm.
6. If it is stated otherwise.
7. Cover to reinforcement to be 50mm.

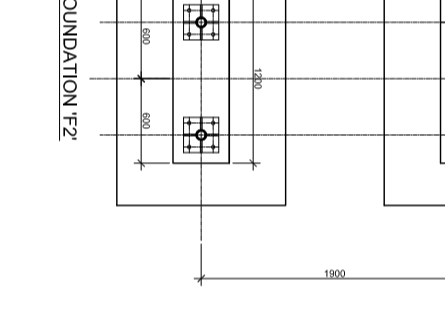

FIM AFRICA			
SCALE	PROJECT TITLE	DRW BY :	CHECKED BY:
NTC	MOTOR BIKE STARTING POINT FRAME	J.M	K.B
EQUIPMENT		REVISION No. 0	
STEELWORK			
EQUIPMENT TITLE		REVISION	
CIVIL GA AND REINFORCEMENT DETAILS		No. 0	